



USB 3.0 to HDMI with Audio&Mic



Front View




Rear View

Introduction

By ten times faster than USB 2.0 just plug and play function, the USB 3.0 to HDMI converter provided a unique solution to add extra display for your computer. It works as the external video card which allows adding an additional display instantly without hassle of open the computer chassis to install the internal graphics card. The connected display can act as mirrored or extended desktop of the main display on your computer. You can experience 1080P video playback through HDMI/VGA interface and Super Speed USB 3.0 for entertainment and other users purposes.

Application

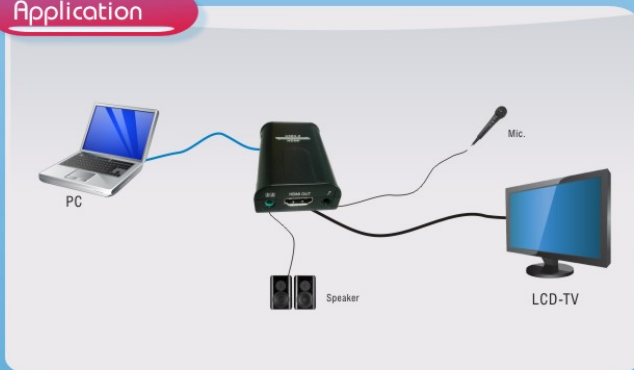

Key Features

- Add-on monitor, LCD or projector through USB3.0 Super-Speed connectivity.
- Supports widescreen aspect ratio 2048 x 1152 video streaming
- Compliant to USB 3.0 specification
- Automatic recognition of monitor type, resolution, and functions.
- Low power consumption via USB 3.0 cable supply
- Plug-n-Play of monitors without reconfiguration
- Compliant to HDMI V1.2 specifications and DVI Ver. 1.0 specifications
- Windows XPDM and WDDM Ver. 1.1 display drivers
 - Supports OS for Windows XP, Windows Vista, Windows 7, and Windows MultiPoint Server 2010
 - Supports display modes: Mirror and extend modes.
- Compatible with Windows power management hibernate and suspend modes
- Output supports stereo audio line and mic
- Resolutions: 640x480, 800x600, 1024x768, 1152x864, 1280x720, 1280x768, 1280x800, 1280x960, 1280x1024, 1360x768, 1400x1050, 1440x900, 1600x1200, 1680x1050, 1920x1080, 1920x1200, 2048x1152
- O.S.Support: Windows 2000/XP/Vista/7 (X86/X64)
- Environment: Operation temp 10°C ~ 40°C (50-104°F)
Relative humidity: < 85% non-condensing
Storage temp. -10 °C ~ 85 °C (14~176°F)
- CE / FCC / ROHS compliant.

Specifications

Function	USB 3.0 to HDMI with Audio&Mic
Bus Interface	USB3.0(backward compatible with USB2.0)
Connector	HDMI/F x 1, 3.5 ϕ jack audio x 1, A-Type/F x 1 3.5 ϕ jack mic. x 1 Host upstream link: USB3.0 A Type Female Connector
Resolution	640x480, 800x600, 1024x768, 1152x864, 1280x720, 1280x768, 1280x800, 1280x960, 1280x1024, 1360x768, 1400x1050, 1440x900, 1600x1200, 1680x1050, 1920x1080, 1920x1200, 2048x1152
Max.Resolution	1080p
Bandwidth	1.65G
O.S.Support	Windows 2000/XP/Vista/7 (X86/X64)
Operating temperature	0~45°C
Storage temperature	-10 °C ~ 85 °C (14~176°F)
Dimension	65(W)*45(L)*23(H)
Housing	Plastic